

A B C D E F G H X

1

2


3

4

5

6

REV	DESCRIPTION	DATE
△	RDK-97127	張馨尹 2008/07/09
△	RDK-98020	張馨尹 2009/09/18
△	RDC-99171	謝婉如 2010/04/29

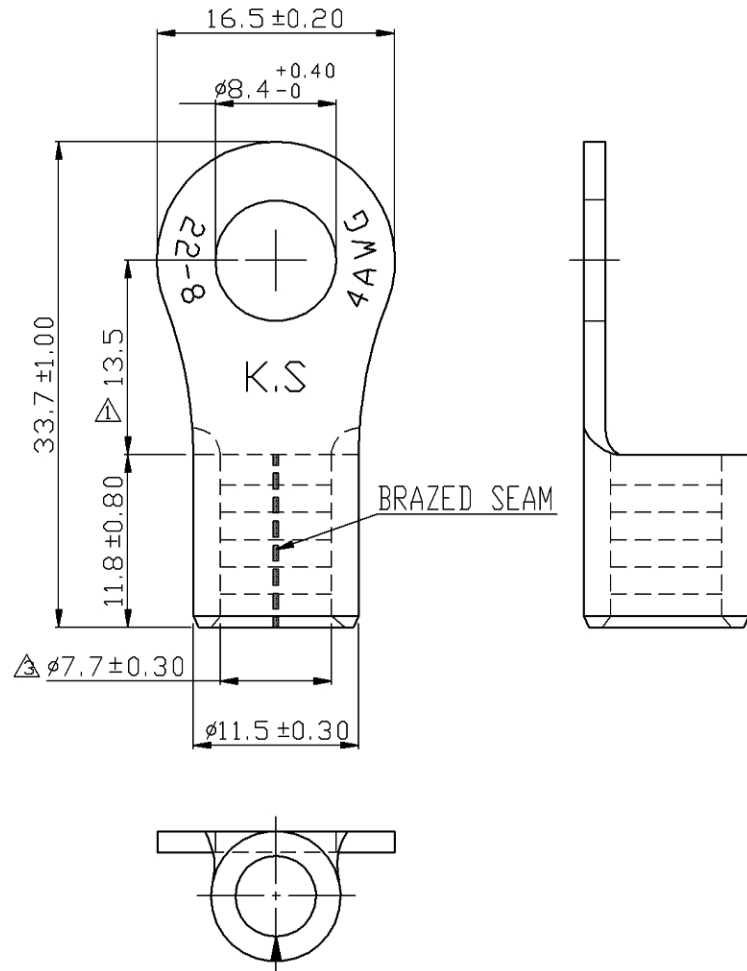

- NOTE :
1. MAXIMUM ELECTRIC CURRENT : 

A.W.G.	4		
AMP.	125		
  2. WIRE RANGE : 4 A.W.G. ( 22 mm<sup>2</sup> )
  3. SURFACE TREATMENT : TIN PLATED
  4. THICKNESS : 1.70 mm

Tolerance Unless Otherwise Specified	
0 >	mm ± ANGLE
>	mm ± 0° ° REF ±
>	mm ± ° ° ±
>	mm ± ° ° ±

NAME	NON-INSULATED RING TERMINALS				UNIT	mm	
PART NO.	DRM25-8	MATERIAL	COPPER	APPROVE			
NUMBER	KT-94475-C	SCALE	SHEET	PAGE	CHECKED		
DATE	2006/09/19	2/1	1-3	10F2	DRAWN		張馨尹

X

A B C D E F G H

6