


1
2
3
4
5
6

x
1
2
3
4
5
6

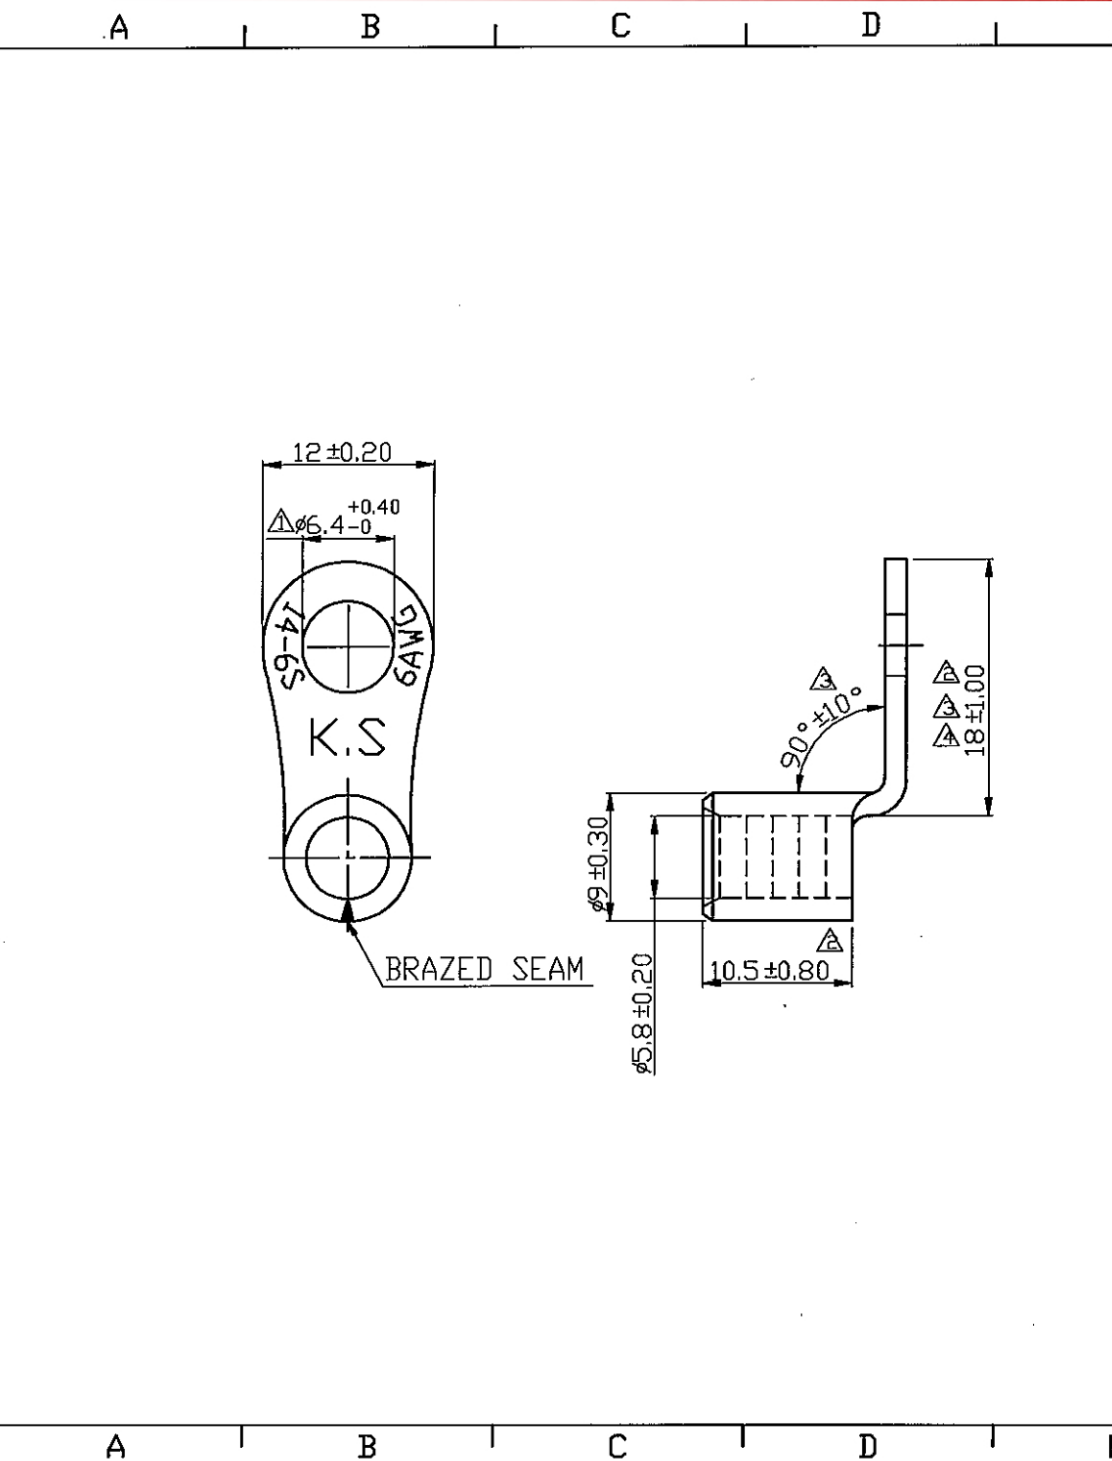

REV	DESCRIPTION	DATE
△	RDK-94197	張馨尹 2005/11/03
△	統一標註	張馨尹 2008/10/13
△	RDK-99134	張馨尹 2011/02/10
△	RDK-99134	張馨尹 2011/04/27

- NOTE :
- MAXIMUM ELECTRIC CURRENT :

A.W.G.	6		
AMP.	95		
 - WIRE RANGE : 6 A.W.G. (14 mm²)
 - SURFACE TREATMENT : TIN PLATED
 - THICKNESS : 1.50 mm

Tolerance Unless Otherwise Specified	
0 > 6 mm ± 0.20	ANGLE
6 > 18 mm ± 0.30	0° REF ±
18 > 30 mm ± 0.40	° ±
30 > 75 mm ± 0.50	° ±

NAME	NON-INSULATED RING TERMINALS				UNIT	mm	
PART NO.	DRS16-6-90	MATERIAL	COPPER	APPROVE			
NUMBER	KT-94103-C	SCALE	SHEET	PAGE	CHECKED		
DATE	2005/03/23	2/1	1-4	10F2	DRAWN	張馨尹	

x

x