
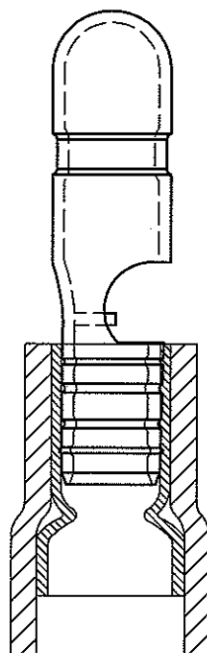


REV	DESCRIPTION	DATE
-----	-------------	------

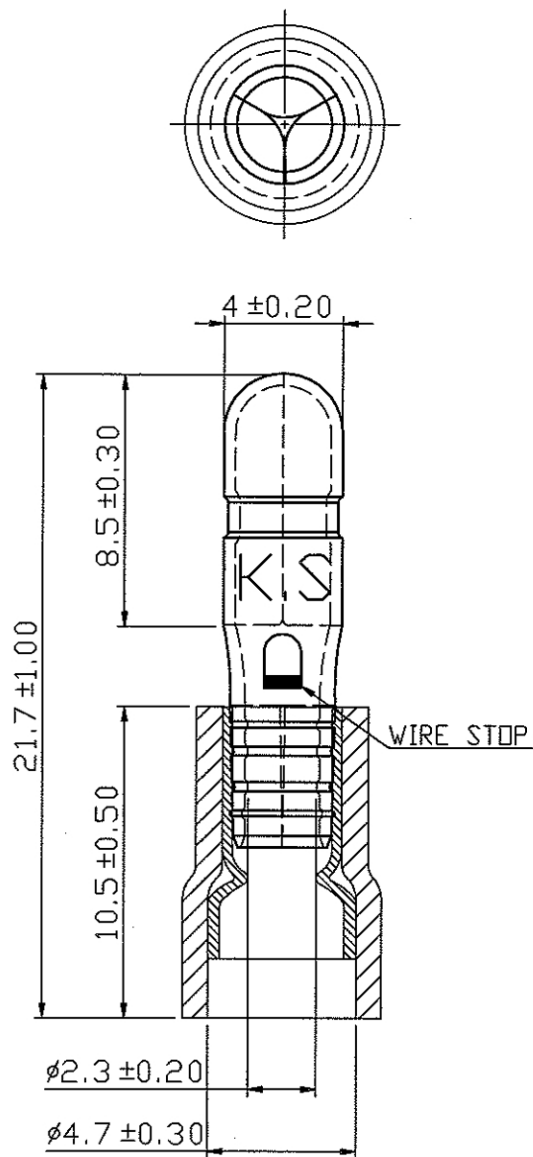

NOTE :

1. MAXIMUM ELECTRIC CURRENT :

A.W.G.	16	14	
AMP.	10	15	
2. MAXIMUM ELECTRICAL RATING : 75°C 600 VOLTS MAX.
3. INSULATION MATERIAL : VINYL
4. INSULATION COLOR : BLUE
5. TERMINAL MATERIAL : BRASS
6. WIRE RANGE : 16-14 A.W.G. (1.5-2.5 mm²)
7. DOUBLE CRIMP : WITH COPPER SLEEVE ON BARREL
8. TERMINAL SURFACE TREATMENT : TIN PLATED
9. TERMINAL THICKNESS : 0.40 mm

Tolerance Unless Otherwise Specified	
0 > 6 mm ± 0.20	ANGLE
6 > 18 mm ± 0.30	0° REF ±
18 > 30 mm ± 0.40	° ±
30 > 75 mm ± 0.50	° ±

NAME	VINYL-INSULATED DOUBLE CRIMP BULLET DISCONNECTORS				UNIT	7	
PART NO.	VBM2-4	MATERIAL	-----	APPROVE			
NUMBER	KA-95154-C	SCALE	SHEET	PAGE	CHECKED		
DATE	2006/03/28	4/1	1-0	10F2	DRAWN	張馨尹	