


A B C D E F G H X

REV	DESCRIPTION	DATE
△	RDK-97127	張馨尹 2008/11/12
△	RDK-98020	張馨尹 2009/12/14
△	RDC-99217	張馨尹 2010/07/02

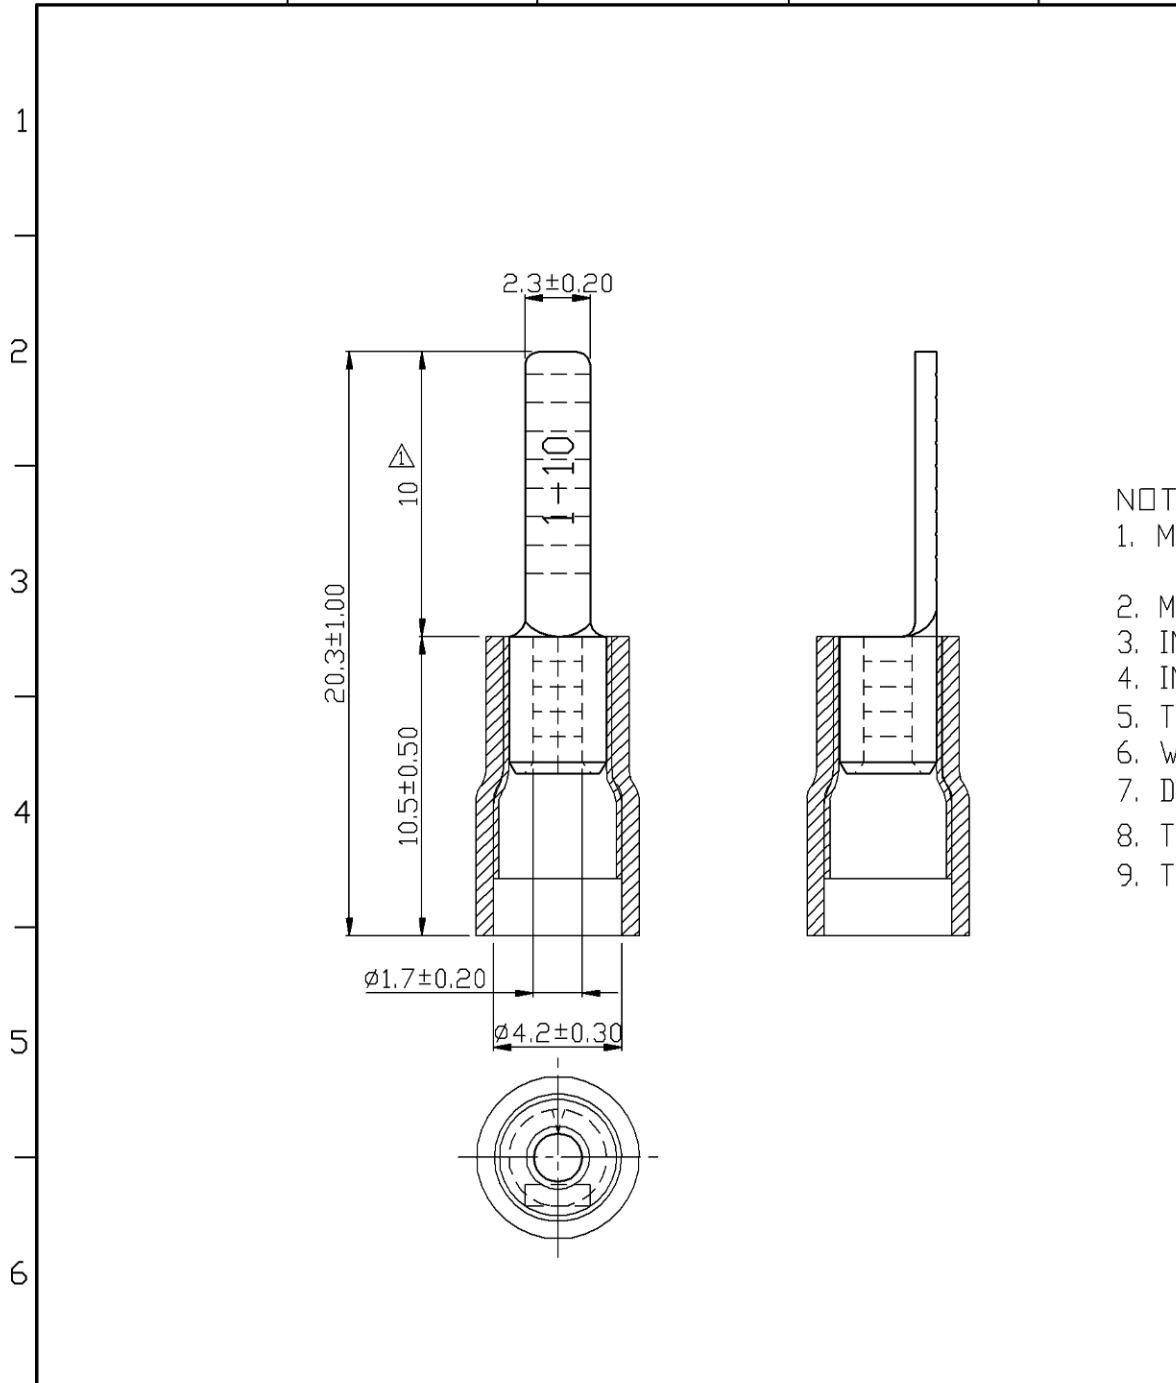

NOTE :

- MAXIMUM ELECTRIC CURRENT :

A.W.G.	22	20	18	16
AMP.	9	12	17	30
- MAXIMUM ELECTRICAL RATING : 105°C 600 VOLTS MAX.
- INSULATION MATERIAL : VINYL
- INSULATION COLOR : RDE
- TERMINAL MATERIAL : COPPER
- WIRE RANGE : 22-16 A.W.G. (0.5-1.5 mm²)
- DOUBLE CRIMP : WITH COPPER SLEEVE ON BARREL
- TERMINAL SURFACE TREATMENT : TIN PLATED
- TERMINAL THICKNESS : 0.75 mm

Tolerance Unless Otherwise Specified	
0 >	mm ± ANGLE
>	mm ± 0° REF ±
>	mm ± ° ° ±
>	mm ± ° ° ±

NAME	VINYL-INSULATED DOUBLE CRIMP BLADE TERMINALS			UNIT	mm
PART NO.	VDBL1-10-23	MATERIAL	-----	APPROVE	
NUMBER	KA-96626-C	SCALE	SHEET PAGE	CHECKED	
DATE	2007/09/17	4/1	1-3	2 OF 2	DRAWN 張馨尹

A B C D E F G H X