


REV	DESCRIPTION	DATE
BD19005-1		楊駿為 2019/02/25

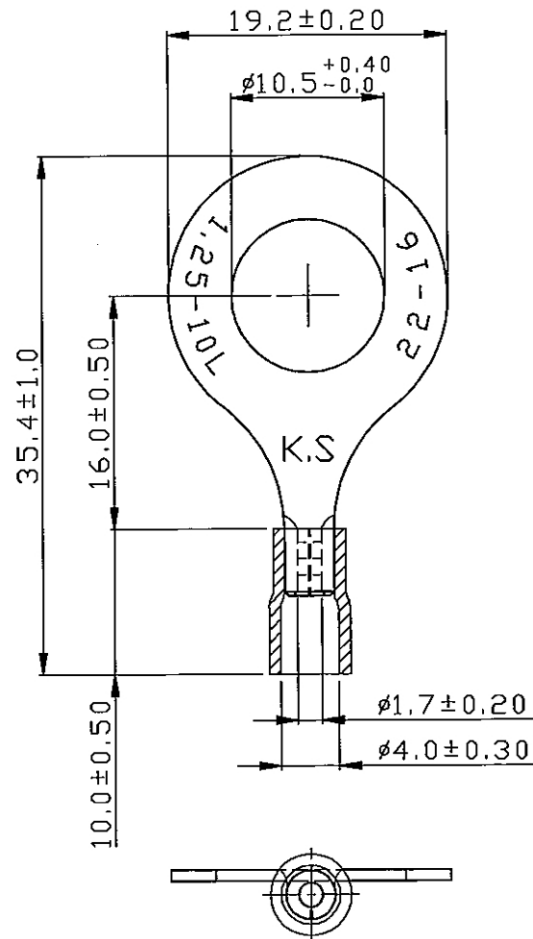

NOTE :

1. MAXIMUM ELECTRIC CURRENT :

A.W.G.	22	20	18	16
AMP.	9	12	17	18
2. MAXIMUM ELECTRICAL RATING : 105°C 600 VOLTS MAX.
3. INSULATION MATERIAL : VINYL
4. INSULATION COLOR : RED
5. TERMINAL MATERIAL : COPPER
6. WIRE RANGE : 22-16 A.W.G. (0.5-1.5 mm²)
7. TERMINAL SURFACE TREATMENT : TIN PLATED
8. TERMINAL THICKNESS : 0.75 mm

Tolerance Unless Otherwise Specified	
0 > 6 mm ± 0.20	ANGLE
6 > 18 mm ± 0.30	0° ° REF ±
18 > 30 mm ± 0.40	° ° ±
30 > 75 mm ± 0.50	° ° ±

NAME	VINYL-INSULATED RING TERMINALS				UNIT	mm
PART NO.	VRL1-10	MATERIAL	-----	APPROVE	楊駿為	
NUMBER	KA-108004-C	SCALE	REV.	SHEET	CHECKED	楊駿為
DATE	2019/02/25	1/1	1-0	1□1	DRAWN	楊駿為